



Top View

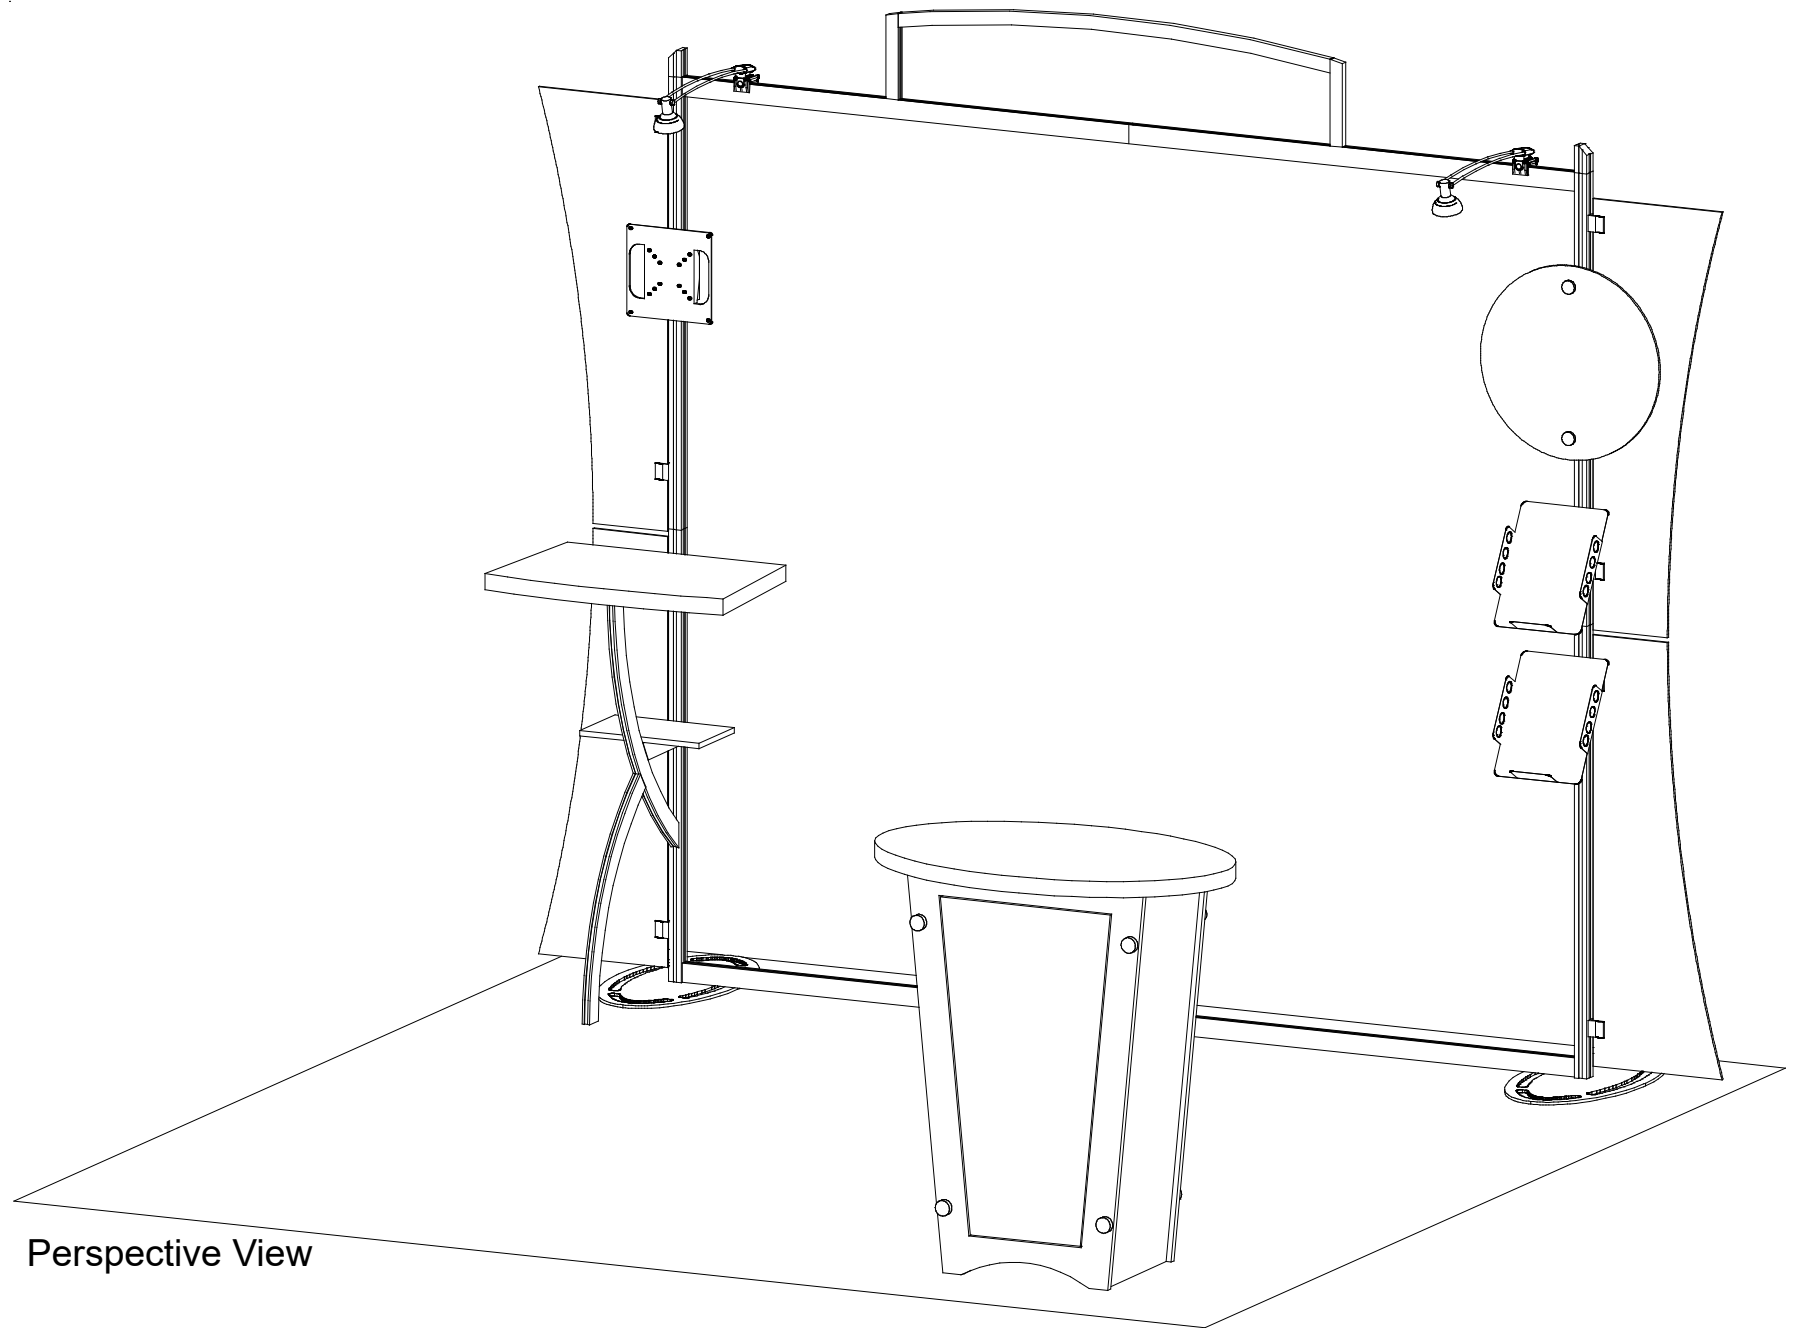

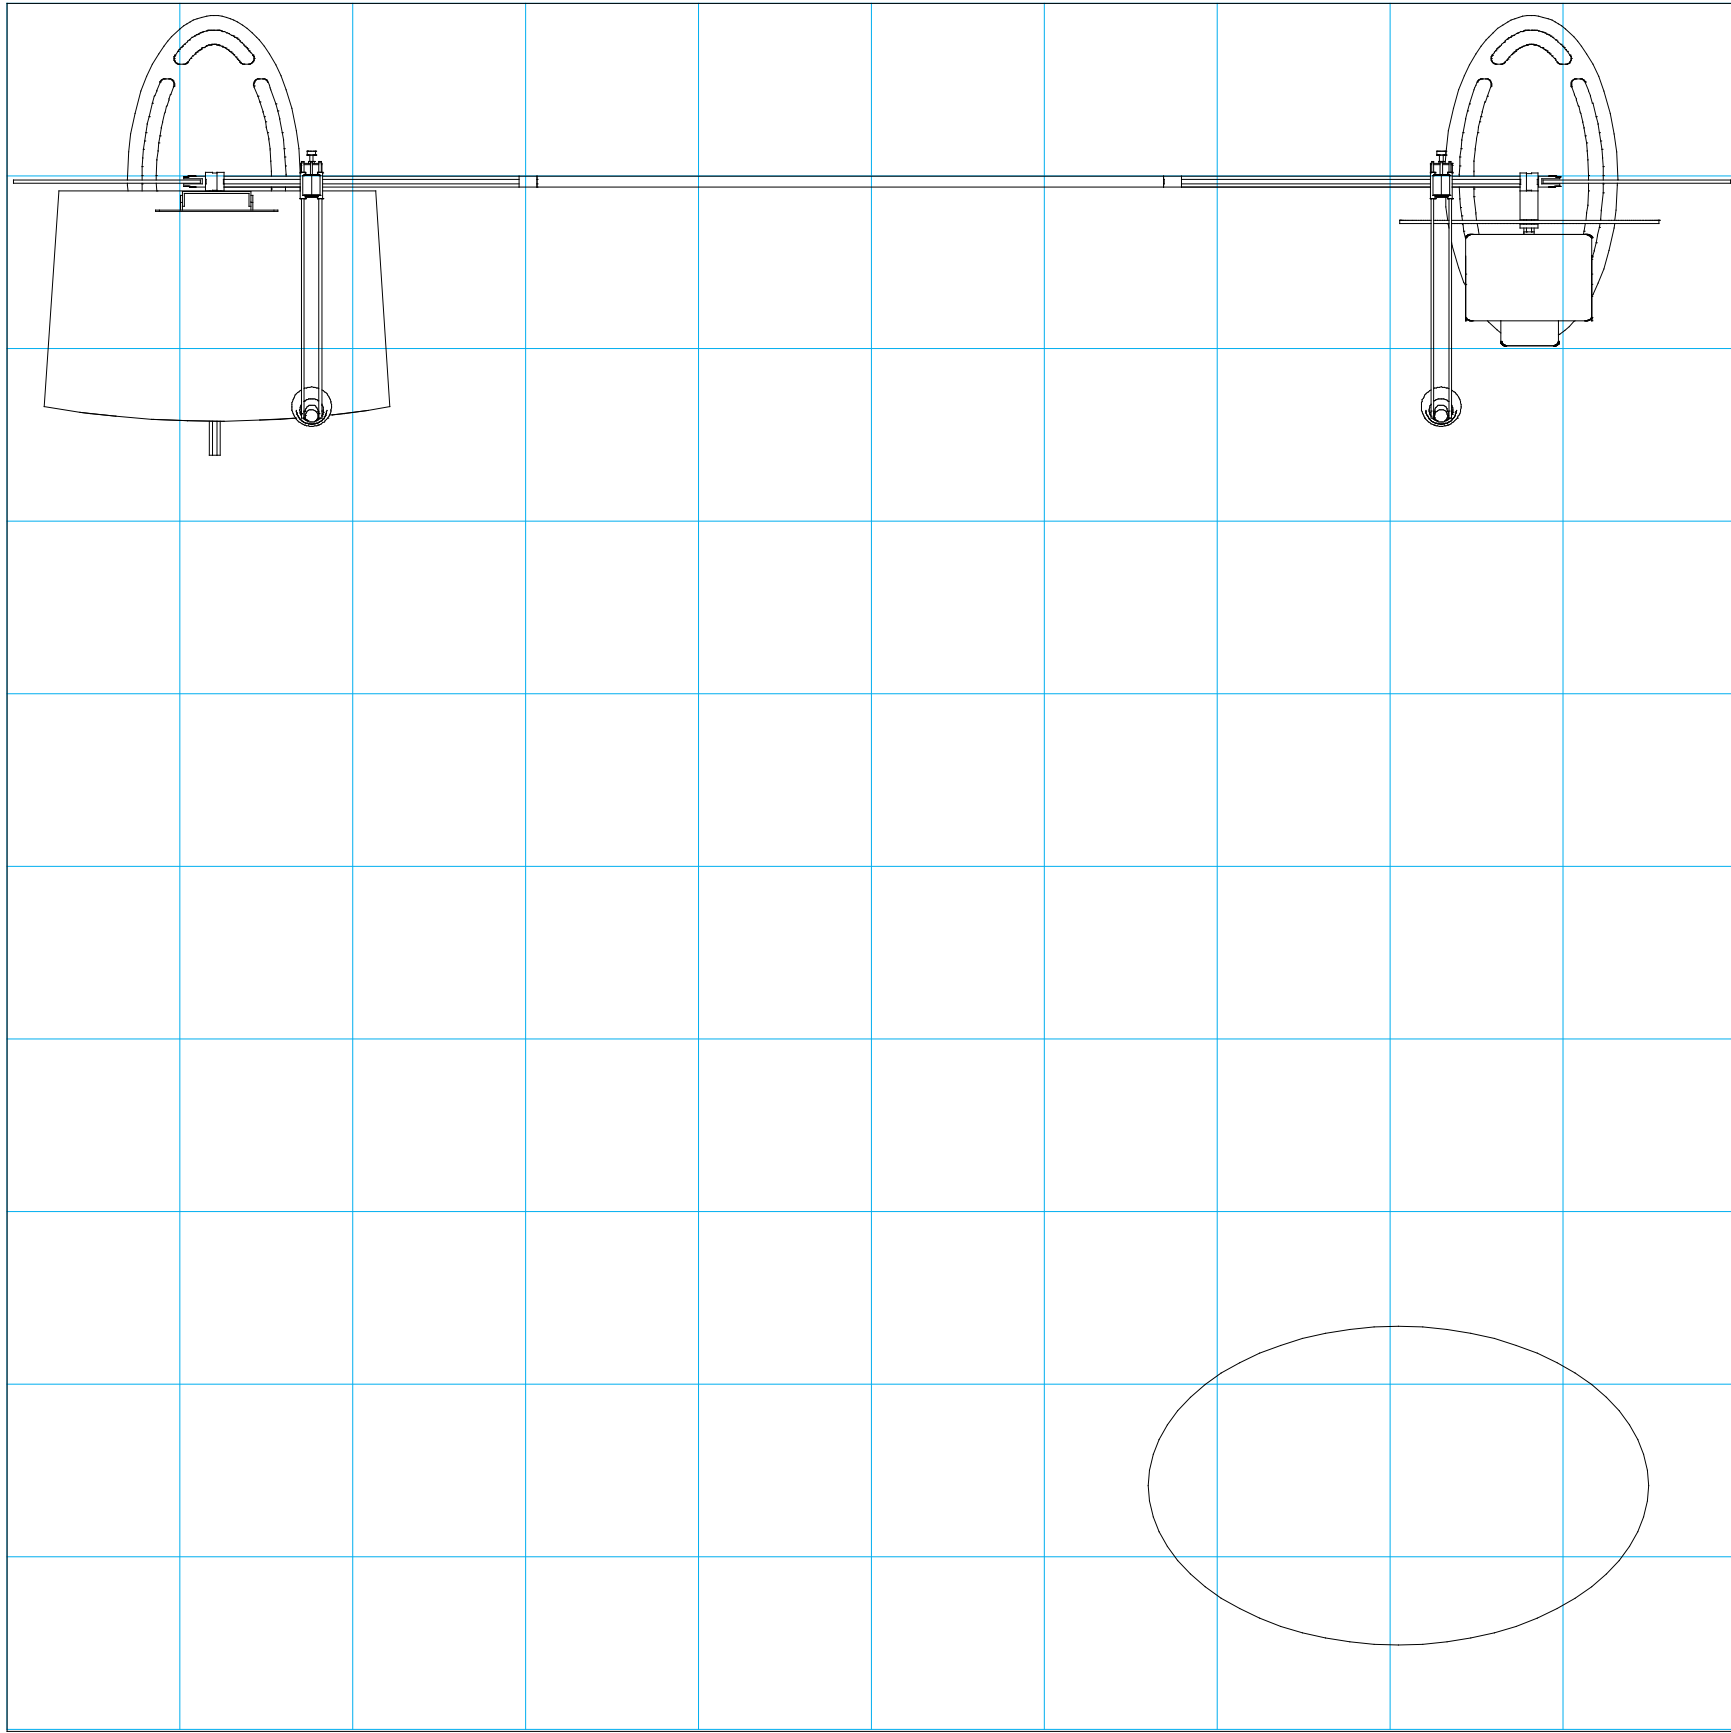

= 1 sq foot

General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

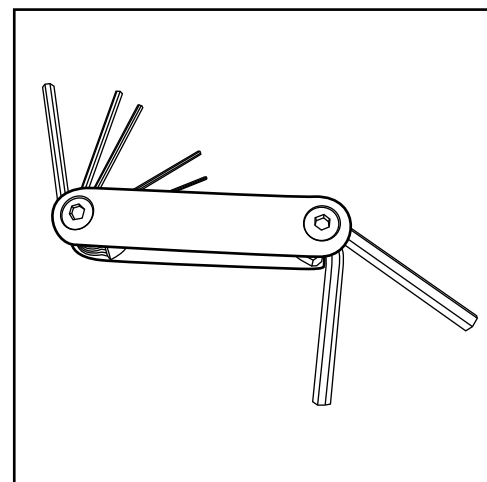


Hex Tool - Essential for Assembly

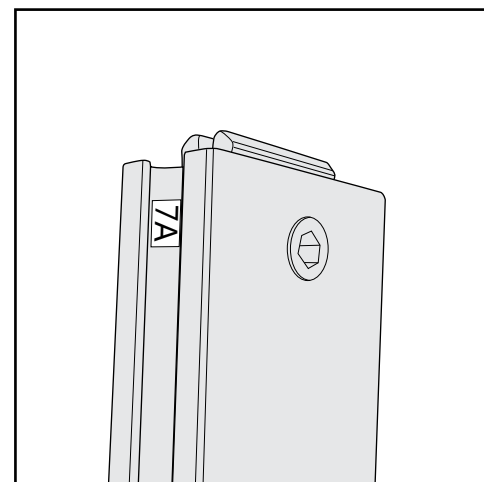


Part Identification - Numbering

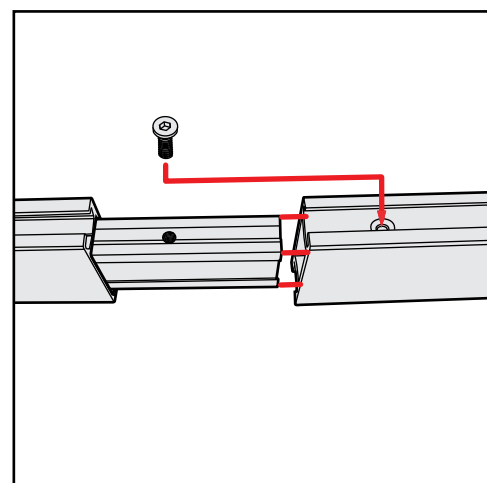


Spline Connection

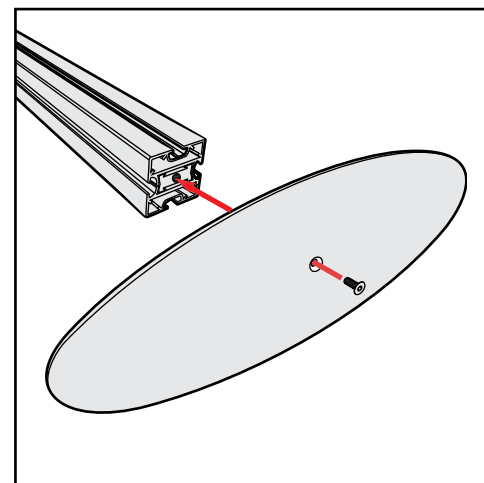

Base Plate & Extrusion Connection

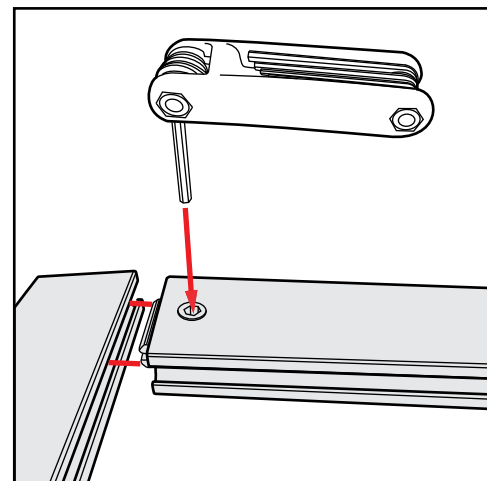


Extrusion & Lock Connection

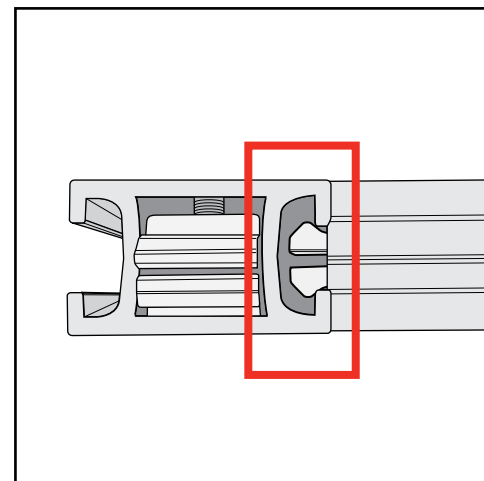

Engaged Lock



WARNING



DO NOT USE POWER TOOLS




LADDERS OR LIFTS
MAY BE REQUIRED




ALL CONNECTIONS MUST
BE TIGHTLY SECURED


Keep rubber clip attached to vertical extrusion.

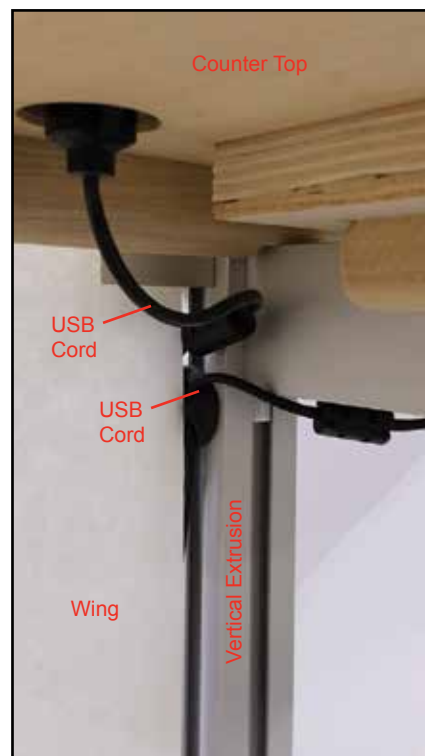


Route cord from right USB port through right side of rubber clip in groove of vertical extrusion.

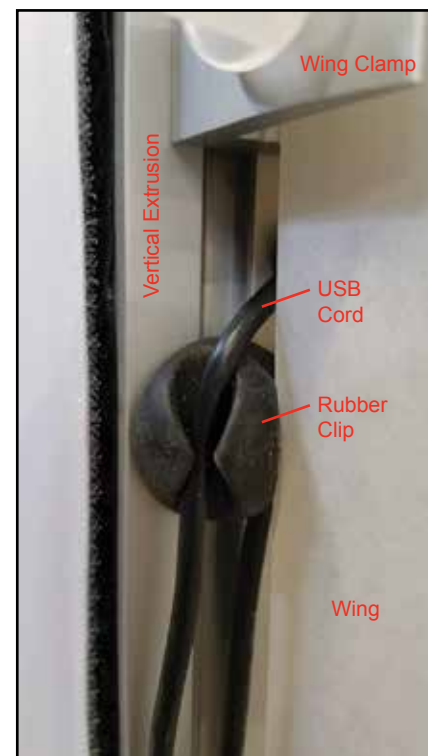

Route cord from left USB port through left side of rubber clip in groove of vertical extrusion.

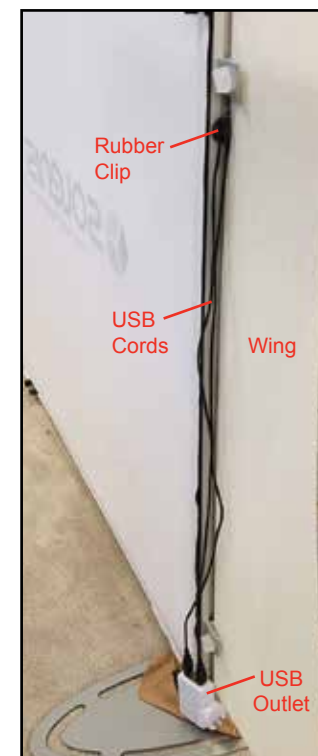


Cords will hang down to USB outlet.

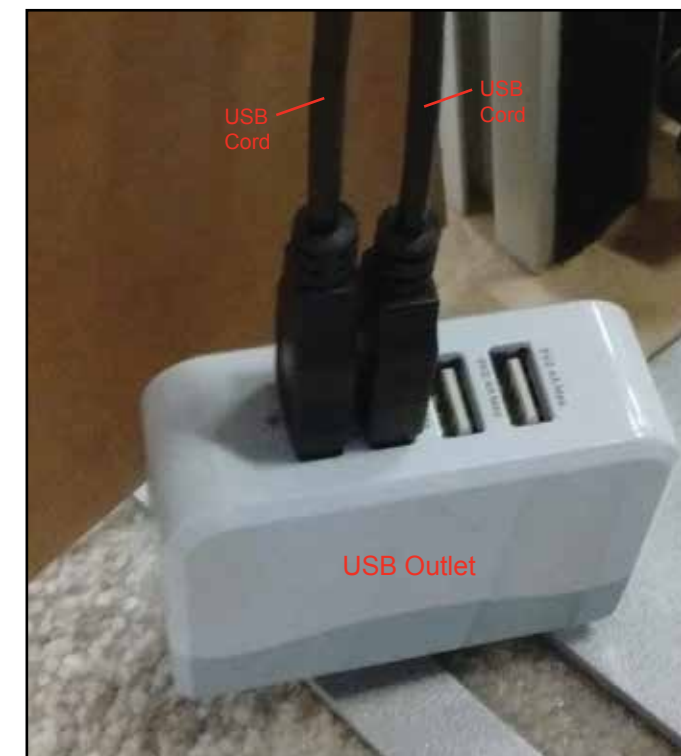


Plug USB cords into USB outlet.


Top View of Each Level

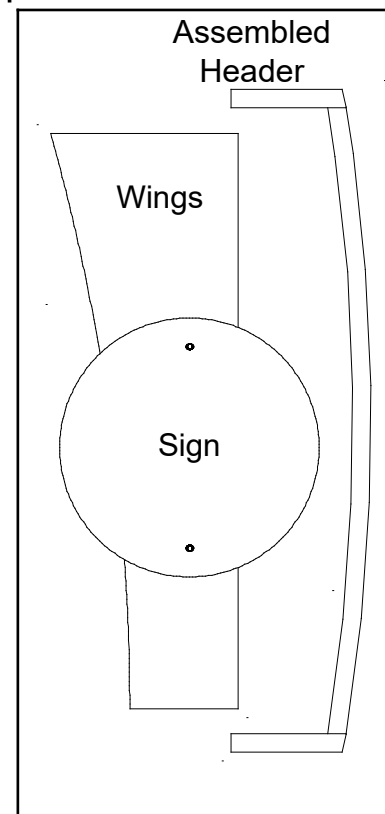


Level 1 (Bottom Level)

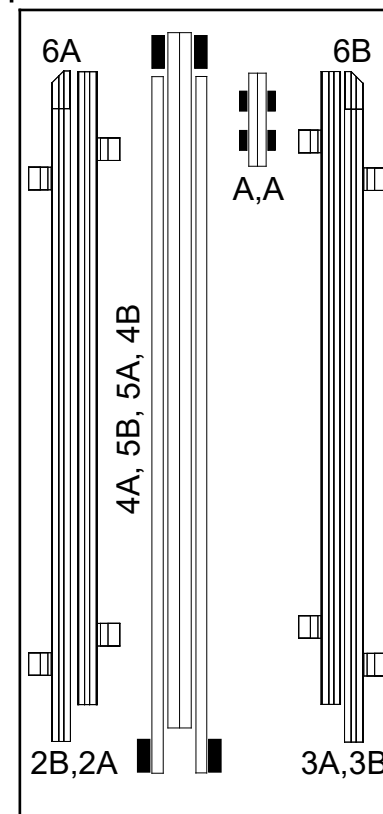


Level 2

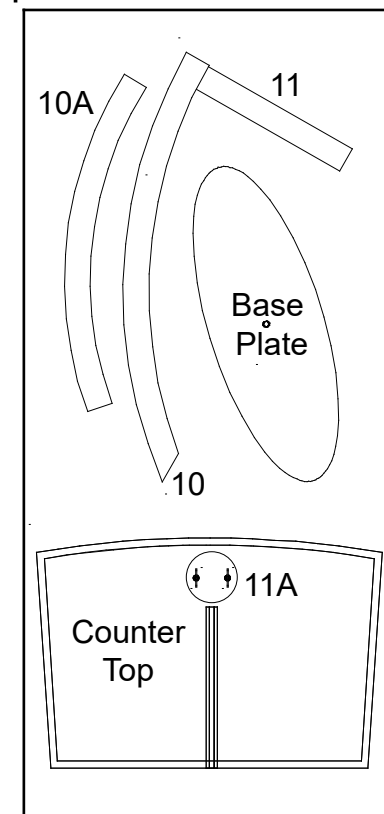

Level 3

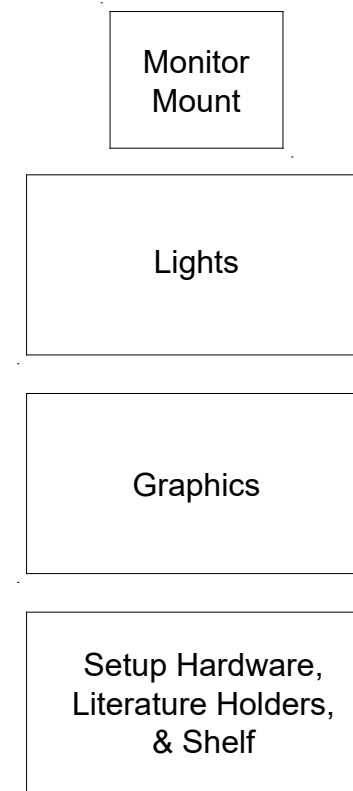


Top View of Each Level

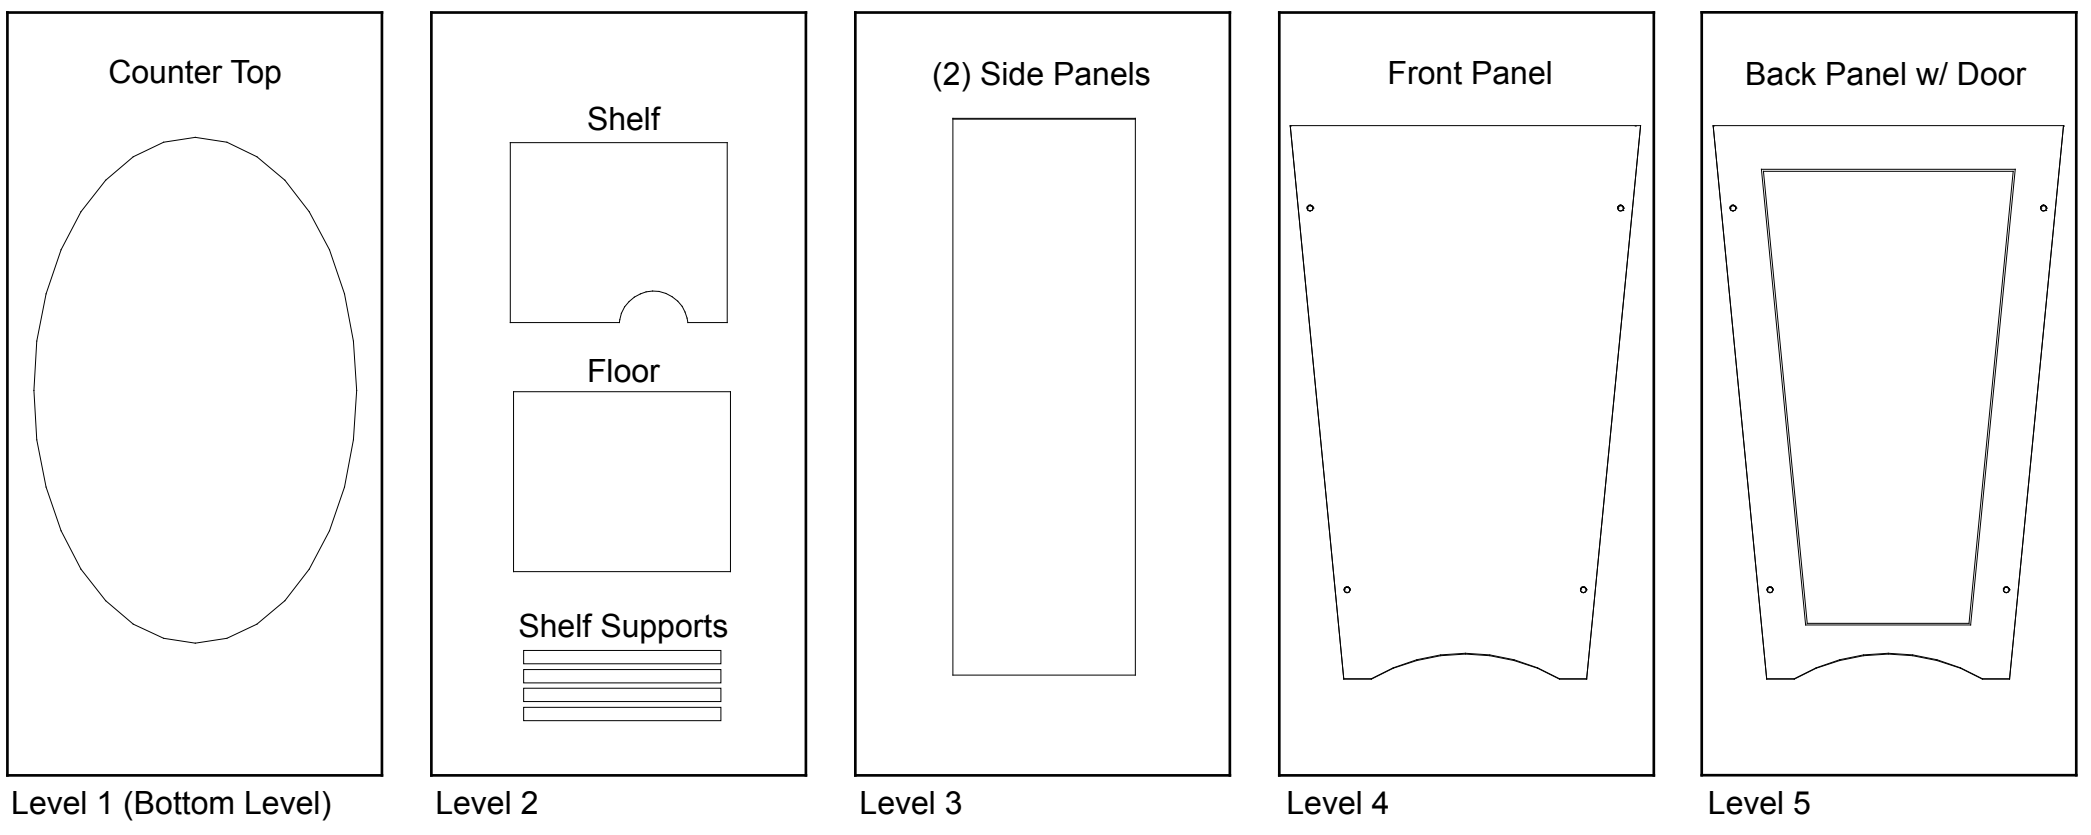

Item	Qty.	Description
1	2	Base Plate
2A,2B	1,1	42" Vertical Extrusion
3A,3B	1,1	42" Vertical Extrusion
4A,4B	1,1	45" Horizontal Extrusion
5A,5B	1,1	45" Horizontal Extrusion
6A,6B	1,1	2.5" Angle-Cut Vertical

- Steps:
- 1) Attach base plates [1] to lower verticals [2A,3A], using bolts.
 - 2) Connect verticals [3A,3B] and [2A,2B] with connection bars [B].
See [Straight Connection with Knobs](#) detail.
 - 3) Connect horizontals [4A,4B] and [5A,5B] with connection bars [A].
See [Straight Connection with Knobs](#) detail.
 - 4) Connect vertical assemblies [2A,2B,3A,3B] with horizontal assemblies [4A,4B,5A,5B].
See [Corner Connection with Knob](#) detail.
 - 5) Connect canopy mounts to [2B] and [3B]. See [2.5" Angle-Cut Vertical Attachment](#) detail.
 - 6) Attach graphics to Velcro on back side of frame.

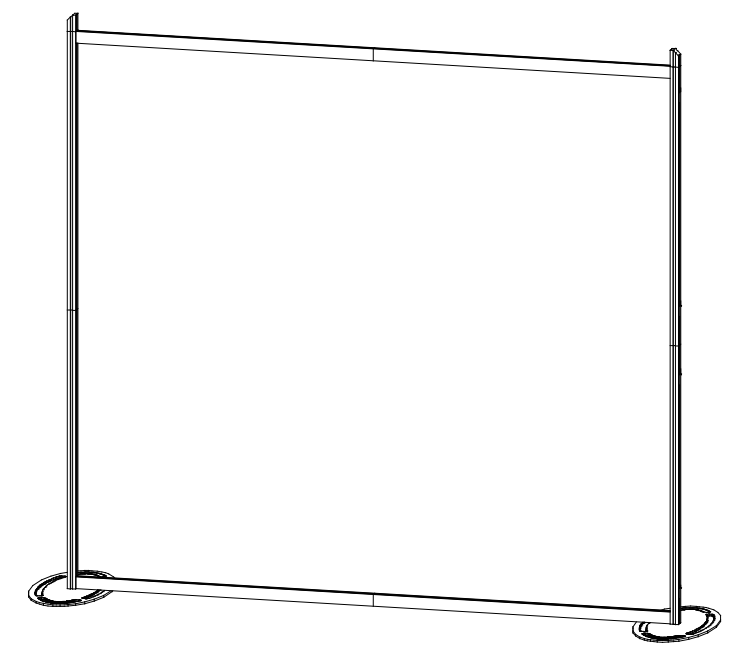

Completed Backwall Assembly

Keep extrusions [6A] and [6B] attached to [2B] and [3B] when packing.


Keep A10 clamps attached to [2A] [2B] [3A] and [3B] when packing.

★ Corner Connection with Knob

Turn knob clockwise to tighten lock.
Do not over tighten Knobs

◇ Straight Connection with Knobs

Slide connection bar between extrusions, then turn knobs clockwise to tighten lock.
Do not over tighten Knobs

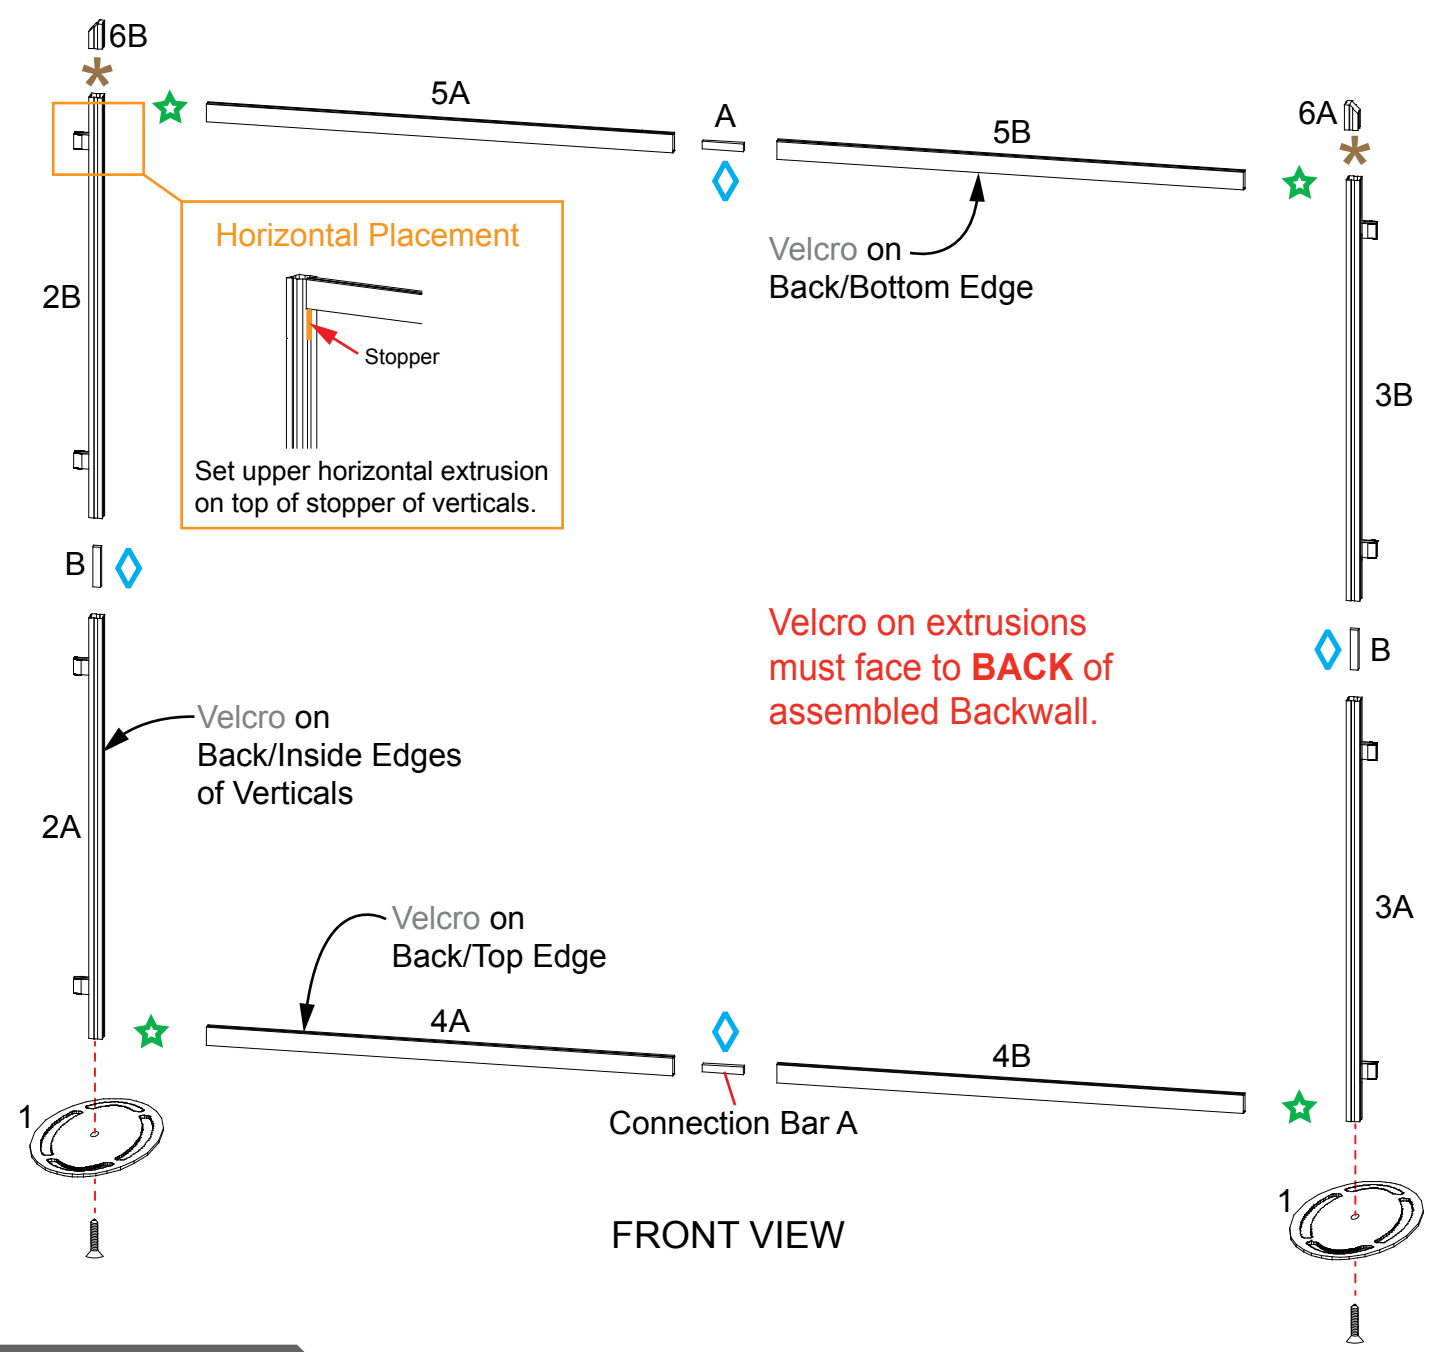

Velcro on extrusions must face to **BACK** of assembled Backwall.

★ 2.5" Angle-Cut Extrusion Attachment

Insert connector into groove of vertical extrusion, then tighten set screw to secure.

Back View of Backwall

Steps:

- 1) Connect lights to top horizontal extrusions [5A/5B]. See [Light Connection](#) detail.
- 2) Attach assembled Header Frame and connect graphic.
- 3) Attach extrusions [10/11] and shelf to vertical [2A].
- 4) Attach support leg [10A] to curved extrusion [10].
- 5) Attach flange plate [11A] to top of curved extrusion [10], using bolt.
- 6) Attach counter top to counter mounting plate [11A]. See Counter Attachment sheet.
- 7) Route USB cords from counter top. See USB Cord Management sheet.
- 8) Attach wings to A10 clamps. See [Clamp Attachment](#) detail.
- 9) Attach monitor mount to vertical [2B], using bolts. See [Monitor Mount](#) detail.
- 10) Attach sign to vertical extrusion [3B]. See [Sign Attachment](#) detail.
- 11) Attach literature holders to [3A/3B]. See [Literature Holder](#) detail.

Item	Qty.	Description
7/8/9	1/1/1	Header Frame
10	1	30.2" Curved Extrusion
10A	1	Support Leg
11	1	12.184" Horizontal Extrusion
11A	1	Counter Mounting Plate

*** Light Connection**

Slide light onto clip then lock clip into groove of horizontal extrusion.

Keep header frame assembled, when packing.

Velcro on extrusions must face to **BACK** of assembled Header.

*** Monitor Mount**

Slide connectors into groove of extrusion. Tighten set screws to secure connectors in place. Attach monitor mount back plate to extrusion, using bolts.

*** Sign Attachment**

Slide connector into groove of extrusion. Tighten set screws to secure in place. Screw standoff into connector. Place sign between standoff and cap then tighten cap to secure sign.


Clamp Attachment

- 1) Slide connector of clamp into extrusion groove.
- 2) Tighten set screw when A10 is in desired location.
- 3) Insert wing into clamp.
- 4) Tighten knob on clamp to secure wing in place.

Keep A10 clamps attached to verticals.

*** Literature Holder**


Attach angled end of connector to literature holder. Attach flat end of connector to vertical extrusion. Tighten locks to secure.

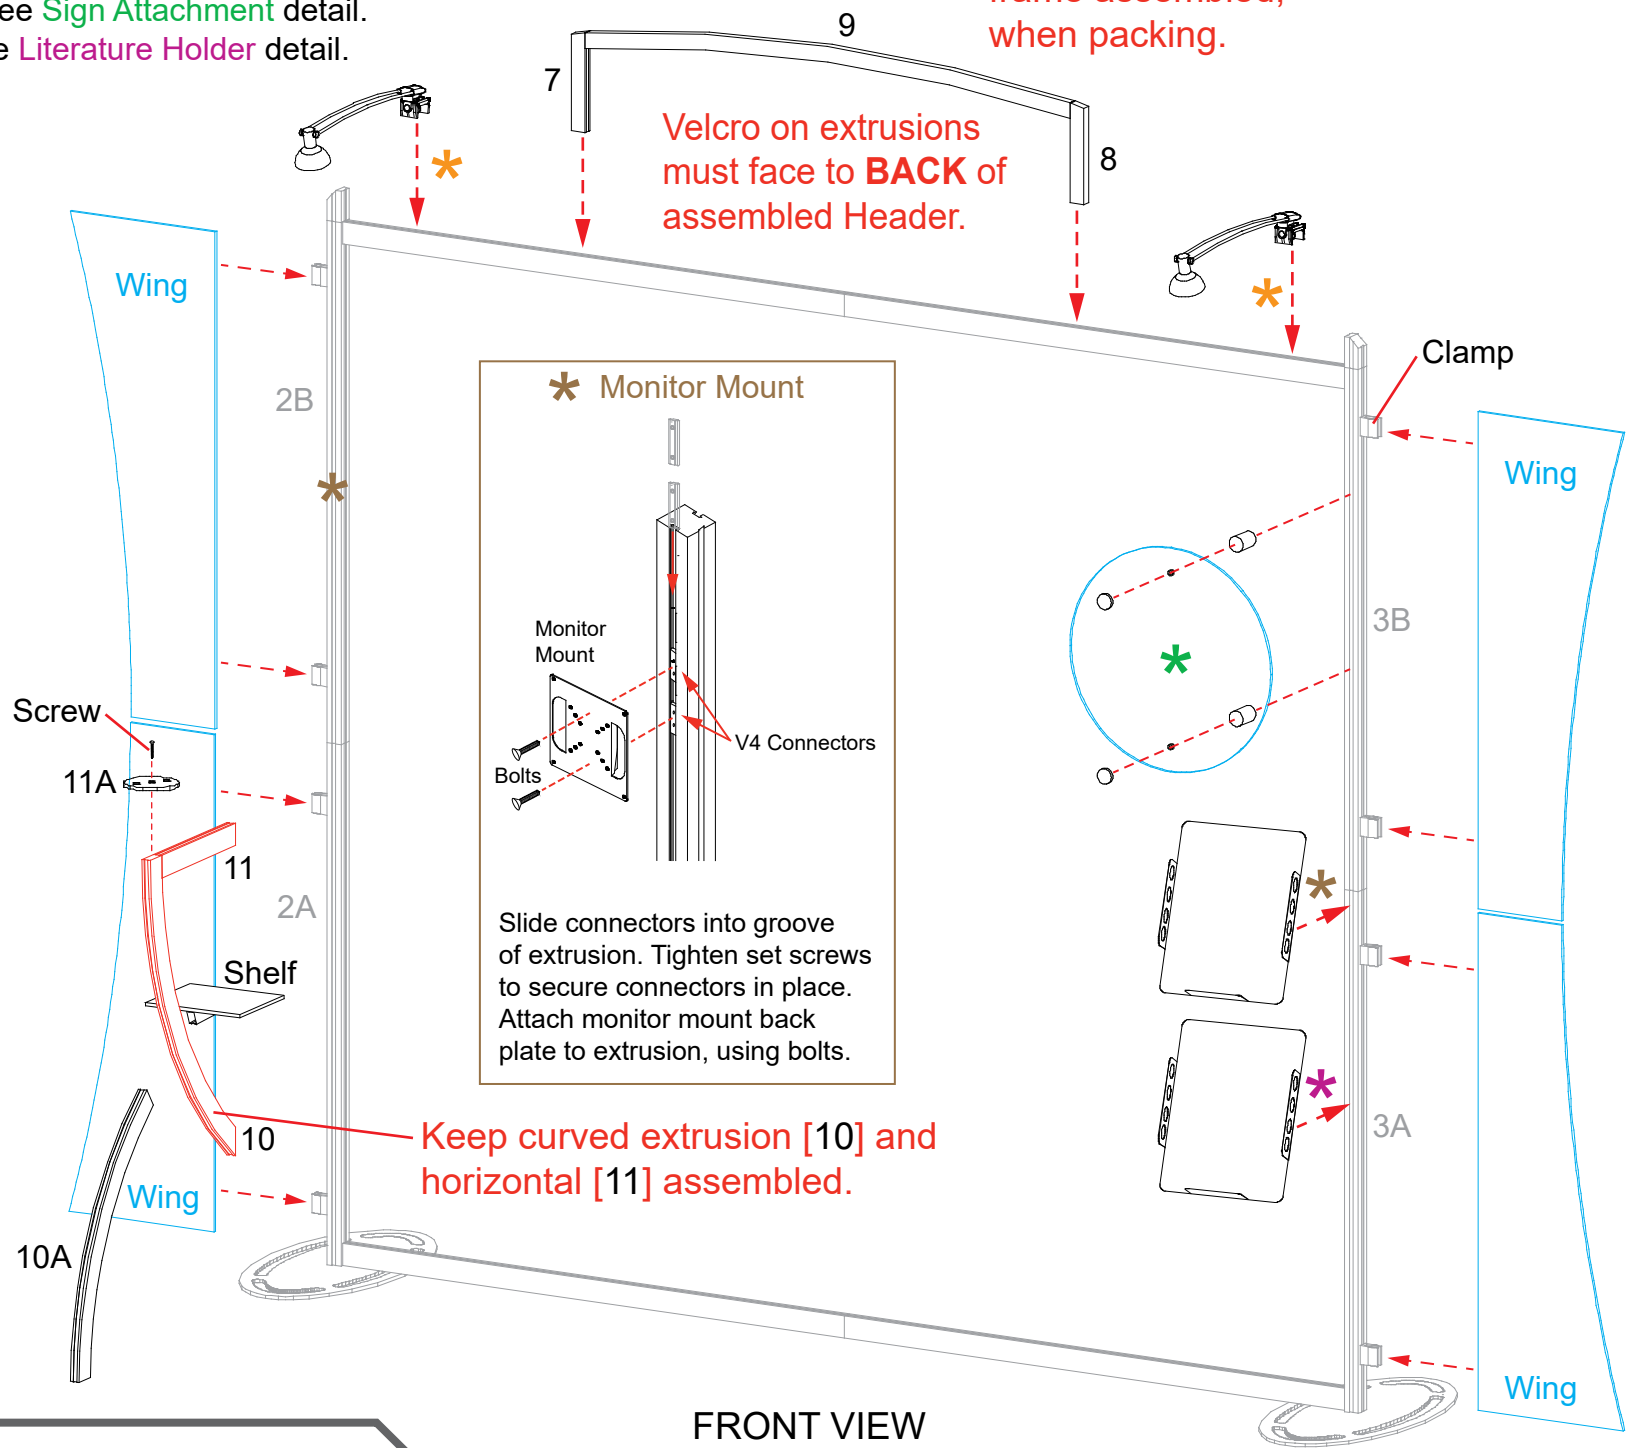


Keep curved extrusion [10] and horizontal [11] assembled.

Setup Instructions:


- 1) Attach pins at bottom interior of side panels. *Note: Pins are designed to be slightly angled.*
- 2) Use screw caps to secure the side panels to front panel and back panels, making sure Velcro is facing inward.
- 3) Slide floor into the bottom of assembled pedestal base. The floor will sit on pins of the side panels.
- 4) Connect shelf supports to Velcro on panels, then place shelf on top of supports.
- 5) Attach pedestal top to assembled pedestal base. See [Pedestal Top Attachment](#) detail.

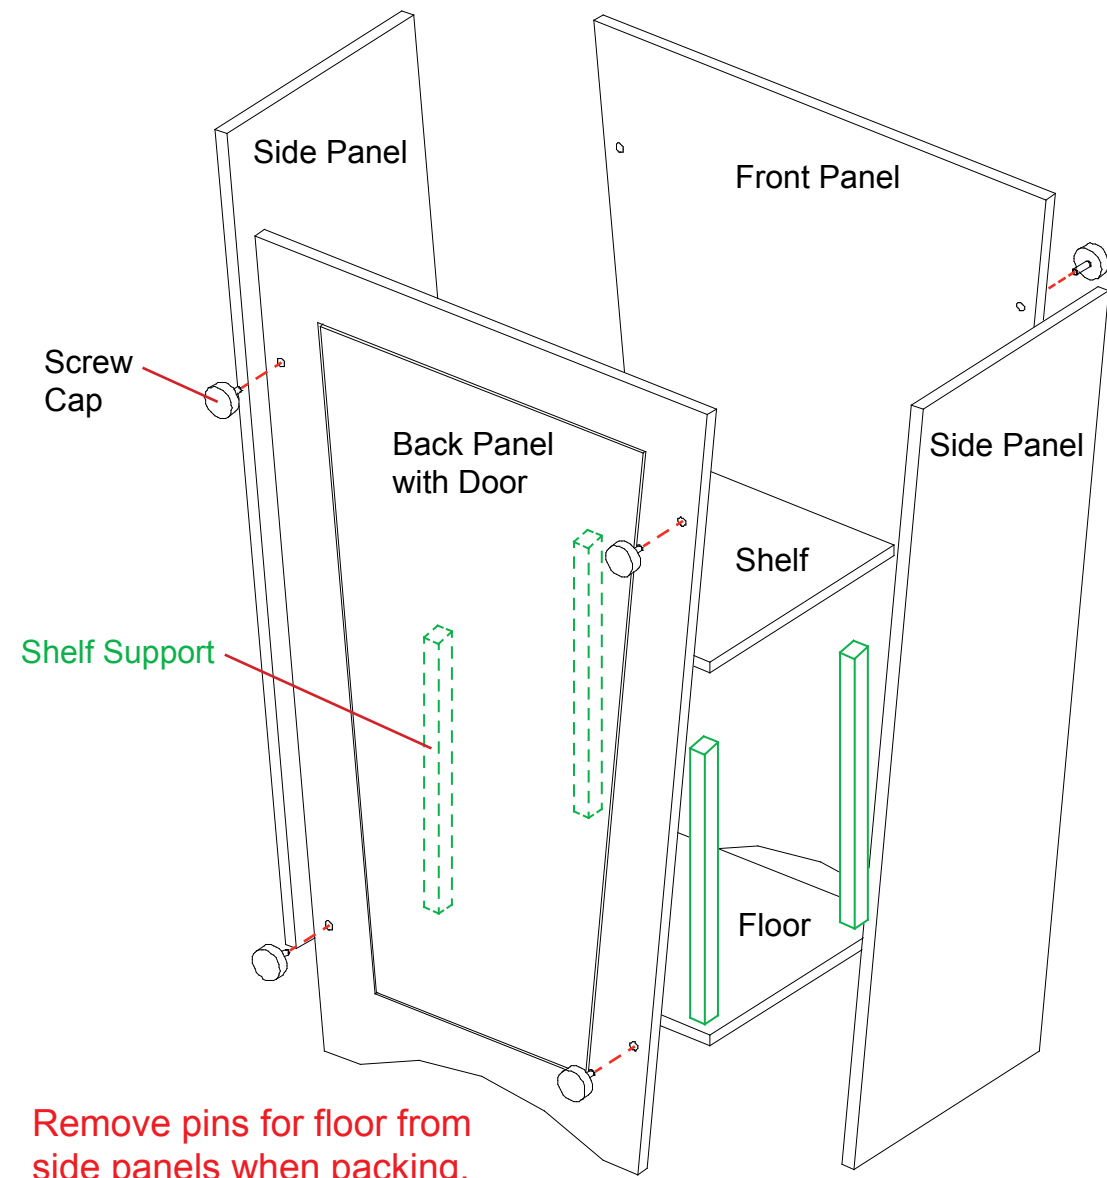

Pedestal Base Assembly

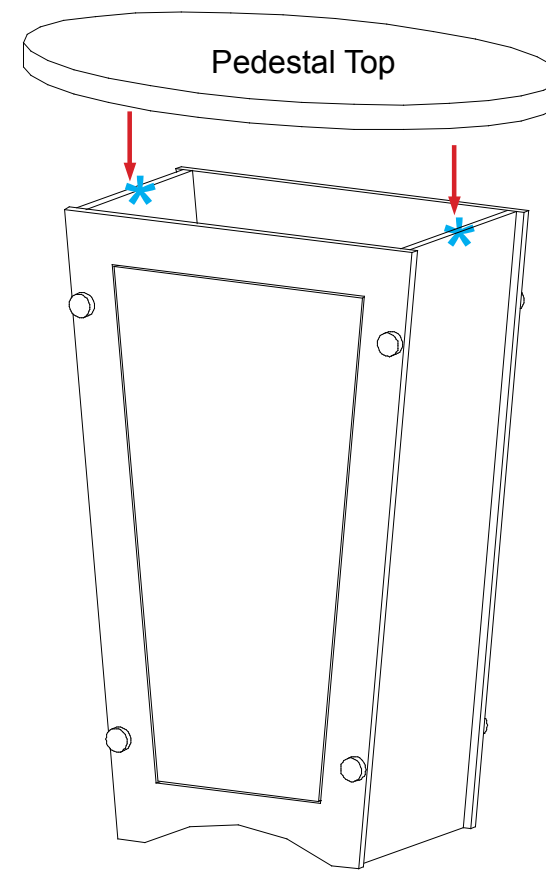

Pedestal Top Attachment

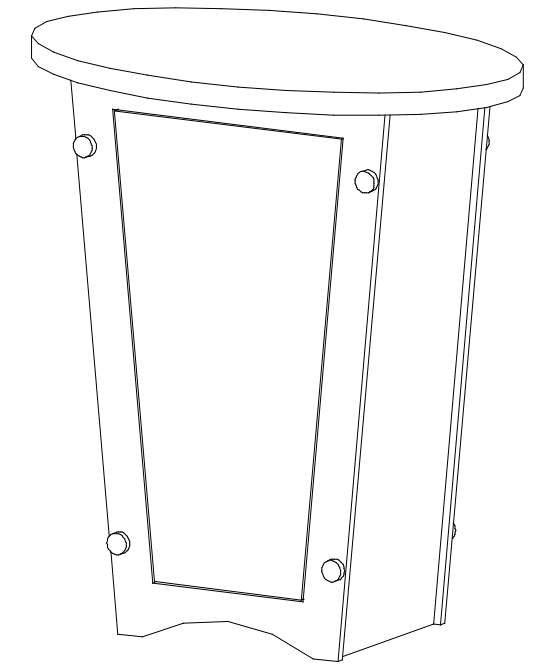

Completed Pedestal Assembly

