

Item	Qty.	Description
1	1	Left Leg Assembly
2	1	Right Leg Assembly
3	1	Hinged Horizontal
4	1	Hinged Horizontal

Perfect 10 Hybrid Displays



Steps:

1) Attach lower and upper horizontal extrusions [3,4] between assemblies by slightly tightening BLACK knobs on backside of extrusion as shown.

NOTE 1: Make sure velcro faces toward back and knobs face horizontally as shown in detail.

NOTE 2: Make sure the lock is flush with extrusion before tightening. If lock will not fully engage, gently rock lock and extrusion while turning knob until lock fully opens.


**** Various Accessories Available ****

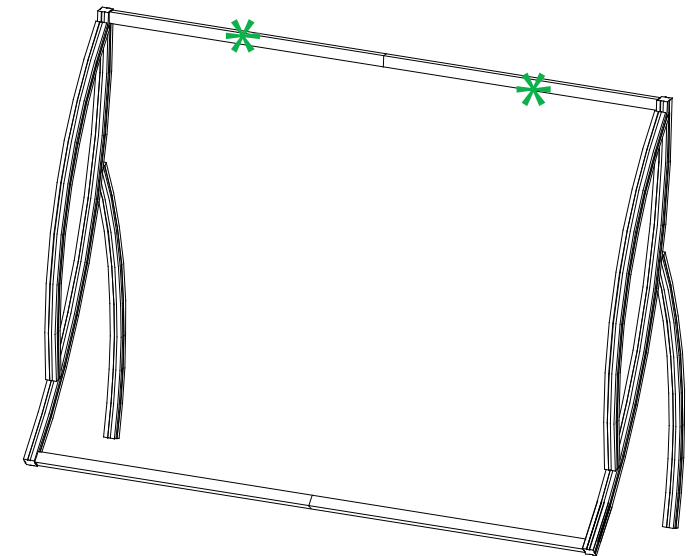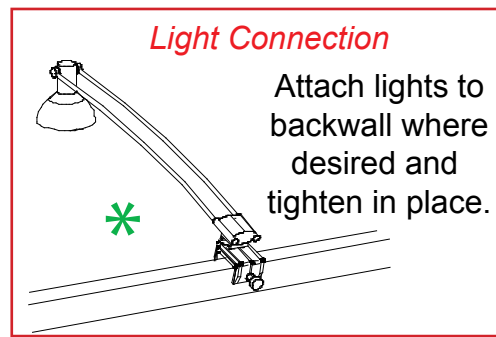


When assembled





NOTE: When assembling horizontals they should be placed approximately one inch from TOP and BOTTOM.

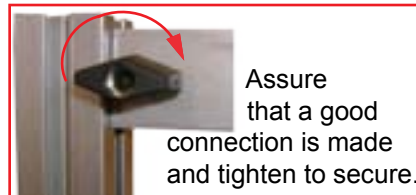

Rear View of Display



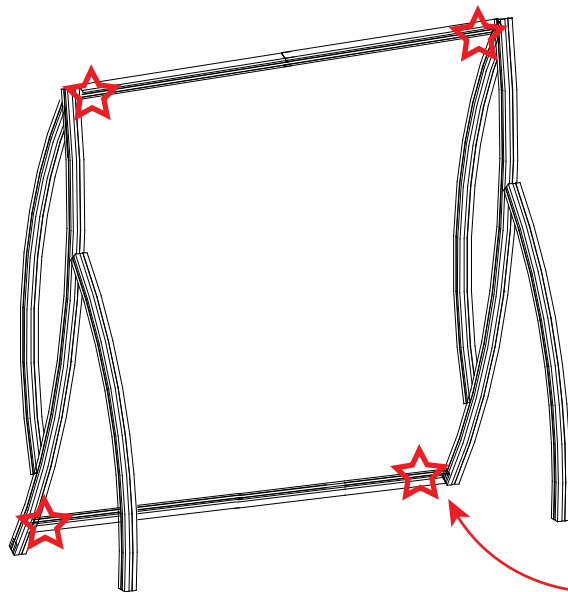


STAR indicates location of knobs on BACKSIDE of unit.

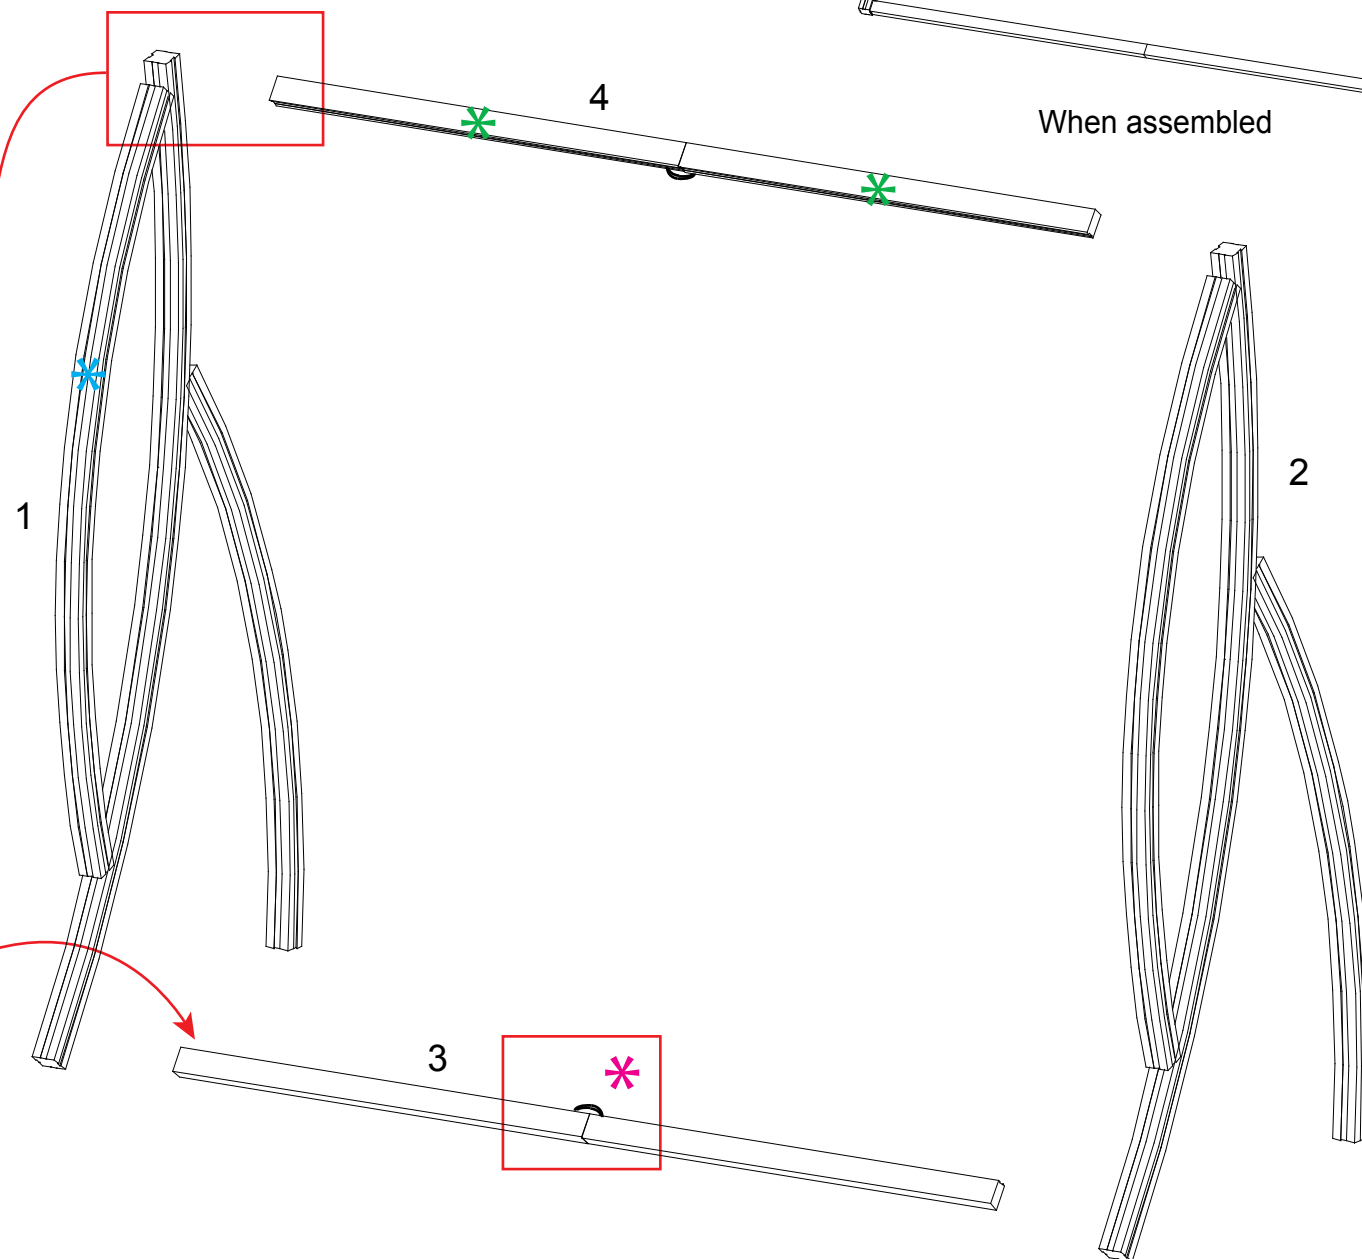

WHEN DISASSEMBLING TIGHTEN ALL KNOBS TO PREVENT LOSS DURING SHIPPING

Top View of Each Level

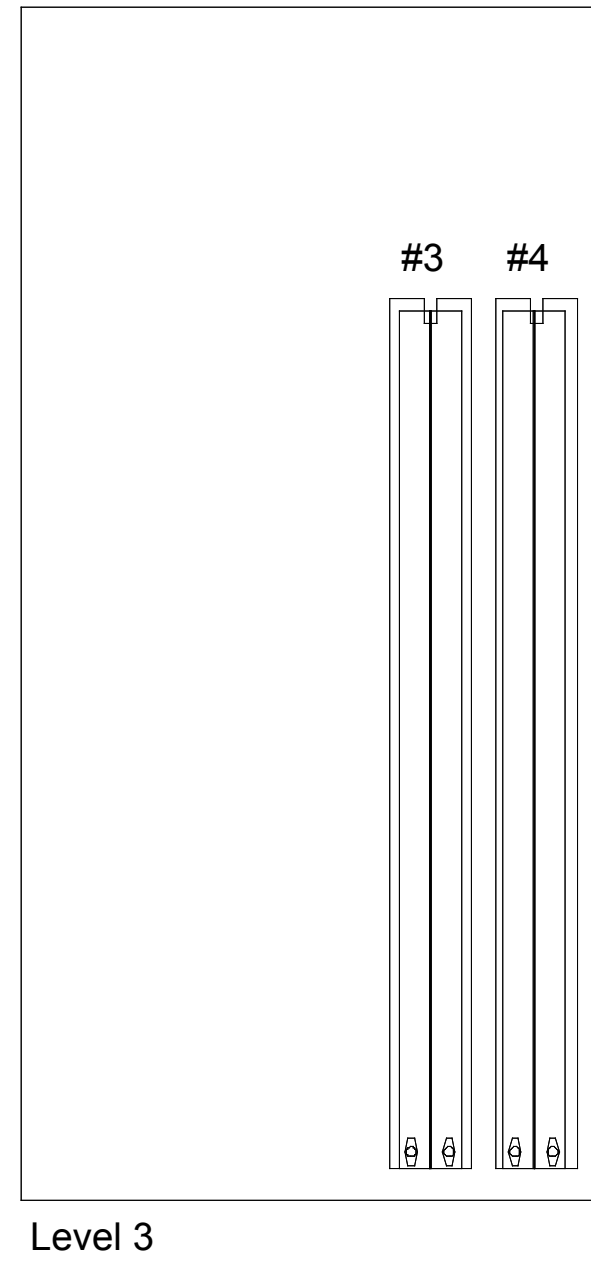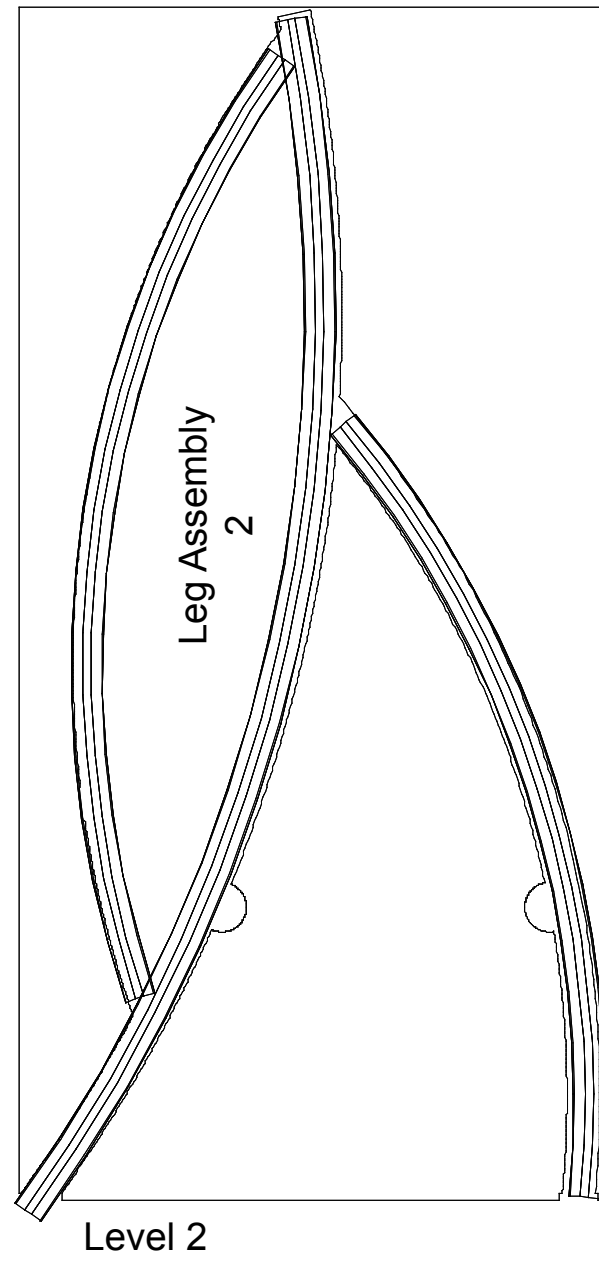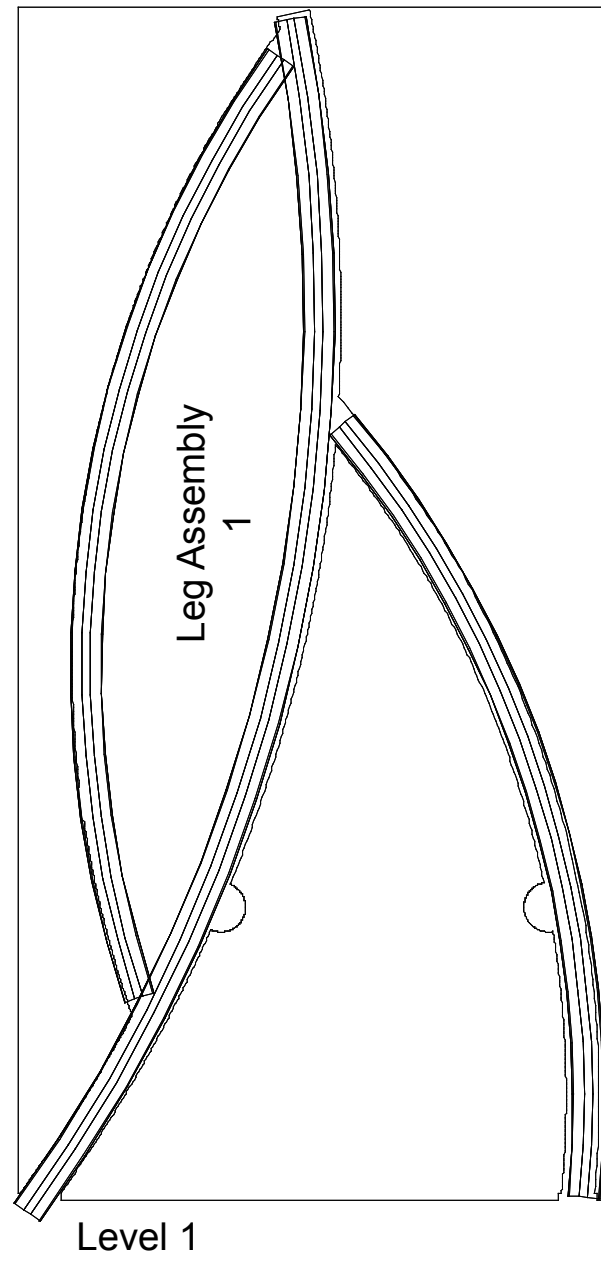

- Halogen Lights
- Graphics
- Setup Hardware

WHEN DISASSEMBLING TIGHTEN ALL KNOBS TO PREVENT LOSS DURING SHIPPING